


Centrifugal Pumps



Scot Pump


A Division of Ardox Corporation

Cast Iron

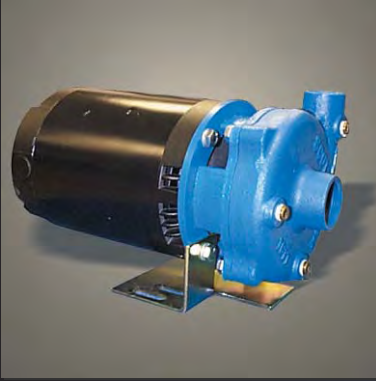



3500 RPM

- High Pressure
- 1/3 to 100 HP
- NEMA J56, JM, JP Frames
- Standard Fitted - Bronze Fitted
- All Iron - Stainless Fitted

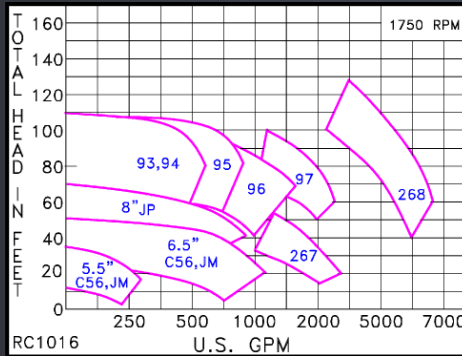

1150 RPM

- High Flow
- 1.0 to 50 HP
- Low NPSH Design
- Standard Fitted - Bronze Fitted
- All Iron

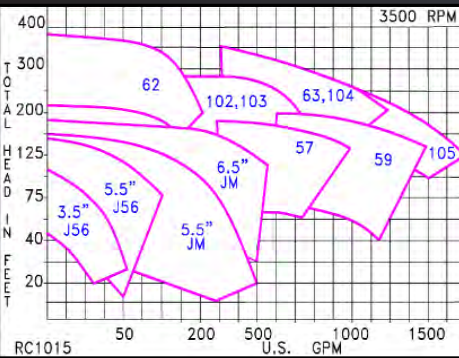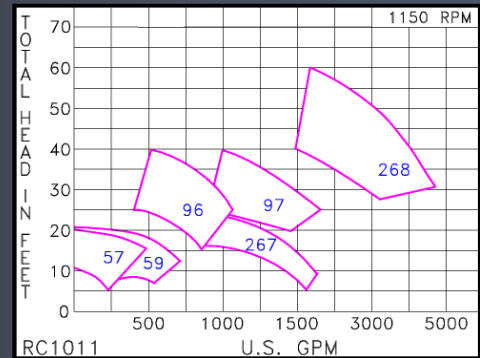

1750 RPM

- High Flow
- 1/3 to 150 HP
- NEMA C56, JM, JP, JPZ Frames
- Standard Fitted - Bronze Fitted
- All Iron - Stainless Fitted

Specialty Pumps

- Semi-Open Impeller
- Vertical Sealless
- Self Priming
- Low Temp Chiller
- DC Motor Driven
- Vortex Handling
- Vertical Floor Mounted
- Side Wall Vertical Flange Mounted
- Hot Oil
- Water Jacketed
- Double Sealed



MotorPumps™



are single stage end suction centrifugal pumps close-coupled to electric motors. They are available in cast iron or welded 304 stainless steel construction with precision machined and balanced impellers. They offer open dripproof, totally enclosed or explosion proof enclosures. Perfect alignment, exceptional seal life. See the MotorPump™ Catalog C137 and Electronic Catalog.

Stainless Steel



Welded Stainless 3500 RPM

- 1/2 to 25 HP
- NEMA J56, JM Frames
- Horizontal or Vertical Sealless
- All Welded 304 Stainless Steel or Cast Iron Stainless Fitted

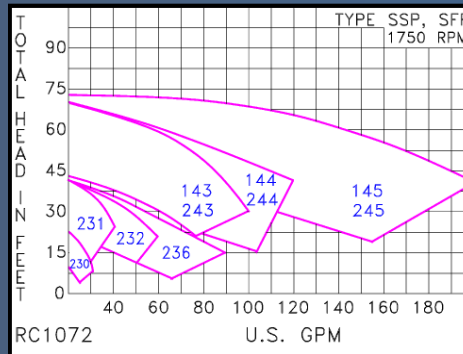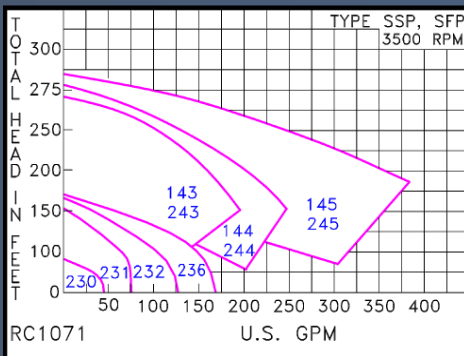


Welded Stainless 1750 RPM

- 1/4 to 5 HP
- NEMA J56, JM Frames
- All Welded 304 Stainless Steel or Cast Iron Stainless Fitted

Cast Stainless 3500 RPM

- 1/3 to 15 HP
- NEMA J56, TC Frames
- Heavy Duty
- Cast 316 Stainless Steel

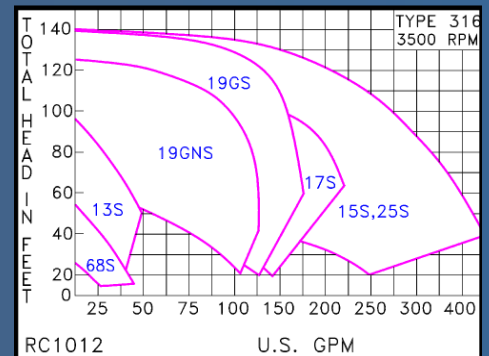



ed to NEMA standard motors. Features include heavy duty cast iron, cast bronze, cast 316 stain-
 secured to the motor with a stainless steel locknut. Pumps have mechanical seals, and motors
 al life and quiet operation are MotorPump™ advantages. Product details and specifications can

All Bronze



3500 RPM

- High Pressure
- 1/3 to 100 HP
- NEMA J56, JM, JP Frames
- Cast Bronze Construction

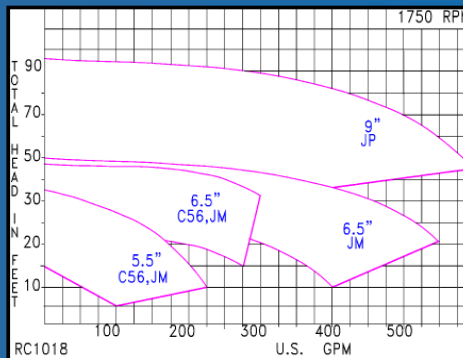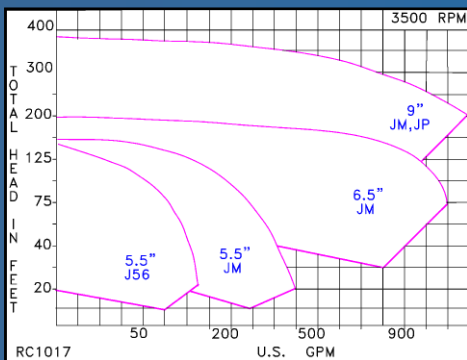

1750 RPM

- High Flow
- 1/3 to 20 HP
- NEMA C56, JM, JP Frames
- Low NPSH Design
- Cast Bronze Construction



Specialty:

- Semi-Open Impeller
- Self Priming
- Low Temp Chiller
- Vortex Handling
- DC Motor Driven



FramePump™

is a trademark for a high quality end suction centrifugal pump mounted on a cast iron bearing frame pedestal. Most FramePumps™ have double sealed pre-lubricated bearings with carbon steel shafts. The frames are offered with shaft extensions for pulley, PTO or electric motor. An optional hydraulic motor or a magnetic clutch drive is also available. Product details and specifications can be found in our Electronic Catalog.

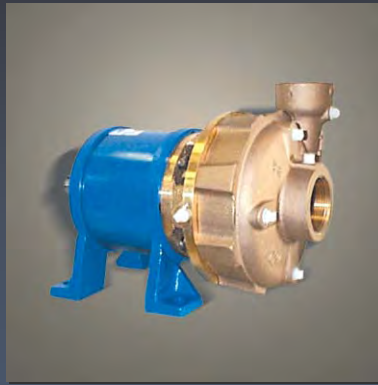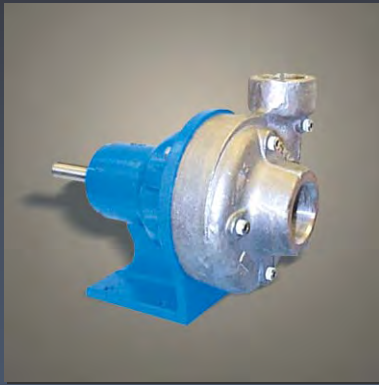

- Capacities to 2500 GPM
- Heads to 350 Feet
- Drive Shafts 5/8" to 1-5/8"
- Cast Iron Bearing Frame
- Sealed Bearings
- Pump Only or With Motor Available
- Iron - Bronze - Cast & Welded Stainless
- Self Priming
- Pressurseal™
- Hydraulic Motor Driven
- Clutch Driven

EnginePump™

is a trademark for a centrifugal pump close-coupled to a gasoline or diesel engine. The pump impeller is threaded to the engine shaft. Perfect alignment, exceptional seal life and worry free operations are EnginePump™ advantages. Product details and specifications can be found in our Electronic Catalog.



- Capacities to 350 GPM
- Heads to 80 PSI
- 5.5 to 13 HP
- 1" and 3" NPT
- All Iron Construction
- Stainless Steel Shaft Sleeve
- Heavy Duty Baseplate
- Mechanical Seal: Buna - Ceramic - Stainless Steel
Severe Duty Available
- Gasoline Engines: Briggs & Stratton - Vanguard - Honda
Diesel Engines: Yanmar

Scot Pump

A Division of Ardox Corporation



Main Office
Manufacturing Facility
6437 Pioneer Road
P.O. Box 286
Cedarburg, Wisconsin 53012-0286
Voice 262.377.7000
Fax 262.377.7330
E-mail: sales@scotpump.com
www.scotpump.com





Cast Iron




3500 RPM

- High Pressure
- 1/3 to 100 HP
- NEMA J56, JM, JP Frames
- Standard Fitted - Bronze Fitted - All Iron - Stainless Fitted

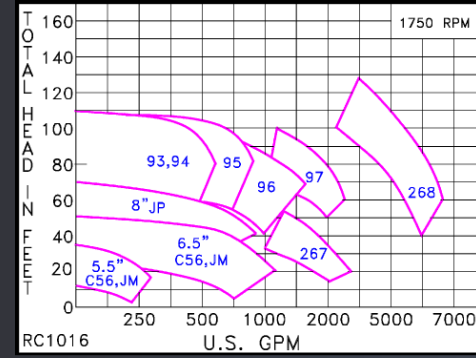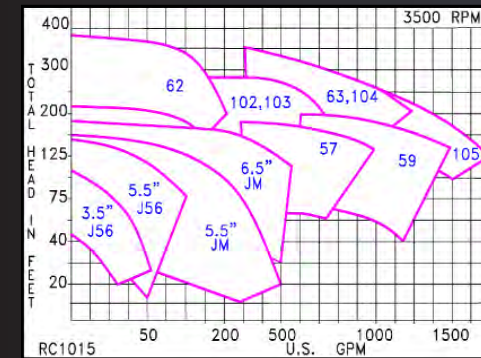

1150 RPM

- High Flow
- 1.0 to 50 HP
- Low NPSH Design
- Standard Fitted - Bronze Fitted - All Iron

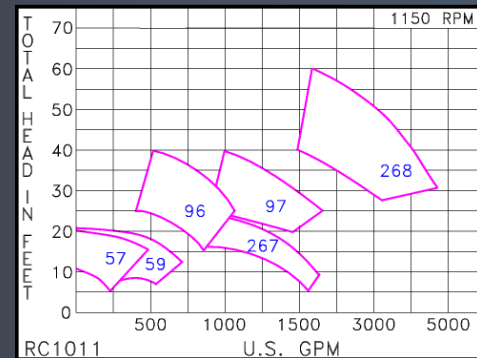

1750 RPM

- High Flow
- 1/3 to 150 HP
- NEMA C56, JM, JP, JPZ Frames
- Standard Fitted - Bronze Fitted - All Iron - Stainless Fitted

- Low Temp Chiller
- DC Motor Driven
- Vortex Handling
- Vertical Floor Mounted

- Side Wall Vertical Flange Mounted
- Hot Oil
- Water Jacketed
- Double Sealed

Specialty Pumps

- Semi-Open Impeller
- Vertical Sealless
- Self Priming



MotorPumps™


are single stage end suction centrifugal pumps close-coupled to NEMA standard motors. Features include heavy duty cast iron, cast bronze, cast 316 stainless steel or welded 304 stainless steel construction with precision machined and balanced impellers secured to the motor with a stainless steel locknut. Pumps have mechanical seals, and motors offer open dripproof, totally enclosed or explosion proof enclosures. Perfect alignment, exceptional seal life and quiet operation are MotorPump™ advantages. Product details and specifications can be found in our MotorPump™ Catalog C137 and Electronic Catalog.

Stainless Steel




Welded Stainless 3500 RPM

- 1/2 to 25 HP
- NEMA J56, JM Frames
- Horizontal or Vertical Sealless
- All Welded 304 Stainless Steel or Cast Iron Stainless Fitted

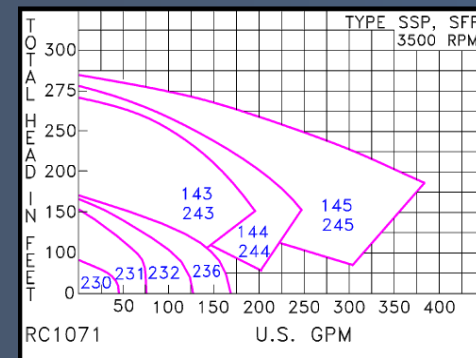


Welded Stainless 1750 RPM

- 1/4 to 5 HP
- NEMA J56, JM Frames
- All Welded 304 Stainless Steel or Cast Iron Stainless Fitted

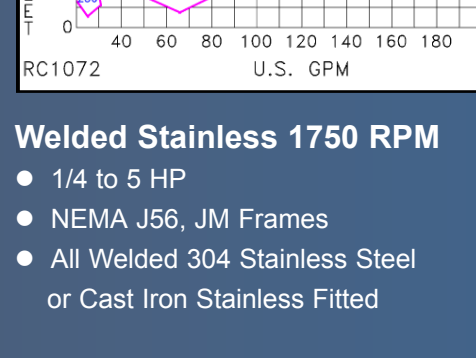

Cast Stainless 3500 RPM

- 1/3 to 15 HP
- NEMA J56, TC Frames
- Heavy Duty
- Cast 316 Stainless Steel

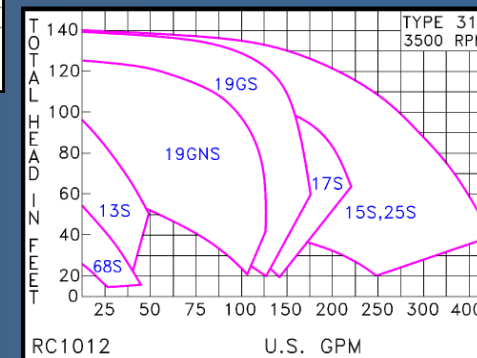


All Bronze




3500 RPM

- High Pressure
- 1/3 to 100 HP
- NEMA J56, JM, JP Frames
- Cast Bronze Construction

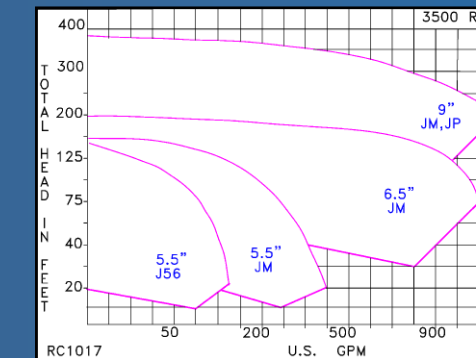

1750 RPM

- High Flow
- 1/3 to 20 HP
- NEMA C56, JM, JP Frames
- Low NPSH Design
- Cast Bronze Construction

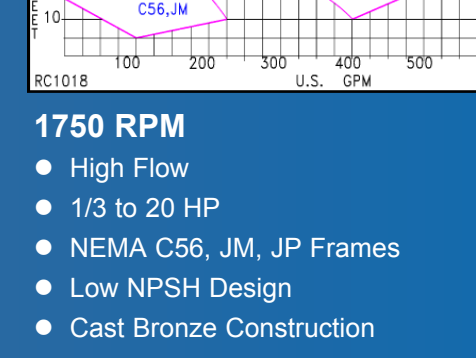

Specialty:

- Semi-Open Impeller
- Self Priming
- Low Temp Chiller
- Vortex Handling
- DC Motor Driven

