


MC15 Series

Magnetic Drive Centrifugal Pump

2.0" FNPT Suction 2.00" MNPT Discharge
575 Max Impeller

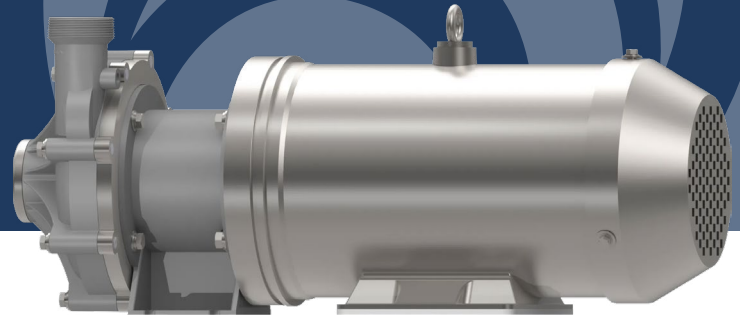


FEATURES

- Magnetic drive with no shaft seals for long life
- Rugged glass fiber reinforced composite construction will not rust, tarnish, or corrode*
- 316L-reinforced inlet*
- Stainless TEFC washdown motor*
- Stainless-steel hardware*
- Dual-voltage multi-frequency 60/50 Hz capable motor (wiring dependent)*

*Standard offering, may change with different options

PERFORMANCE CURVE

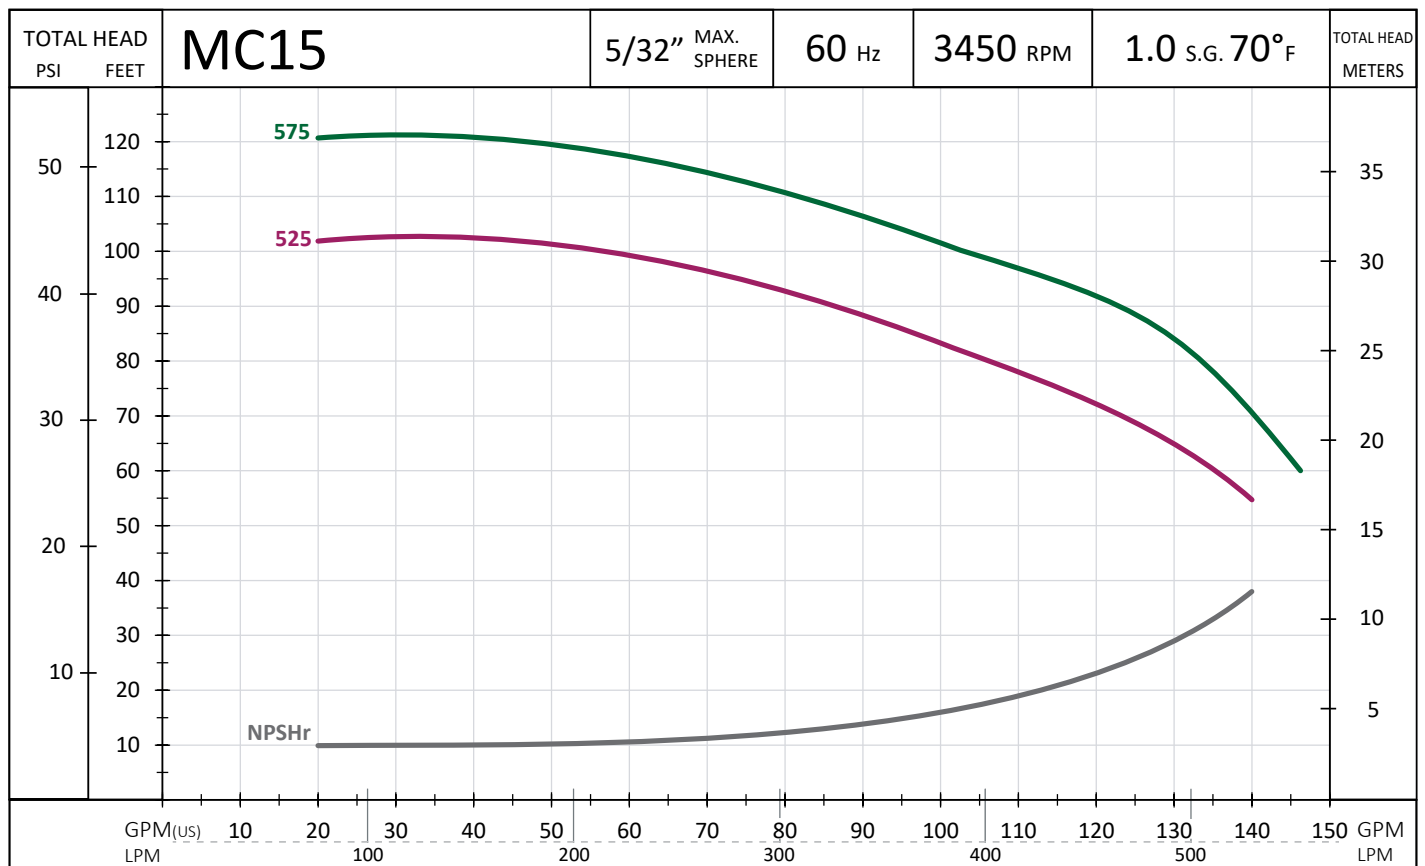


STANDARD WET MATERIALS

HEAD	GFPP (Polypropylene)
IMPELLER	GFPP (Polypropylene), GFPA (Nylon)
WEAR	Al ₂ O ₃ , Carbon Graphite, GF MoS ₂ PTFE, SiC
O-RING	FKM

ADDITIONAL SPECIFICATIONS

MAX FLUID TEMP	180 °F
MAX FLUID VISCOSITY	150 cP

DIMENSIONS

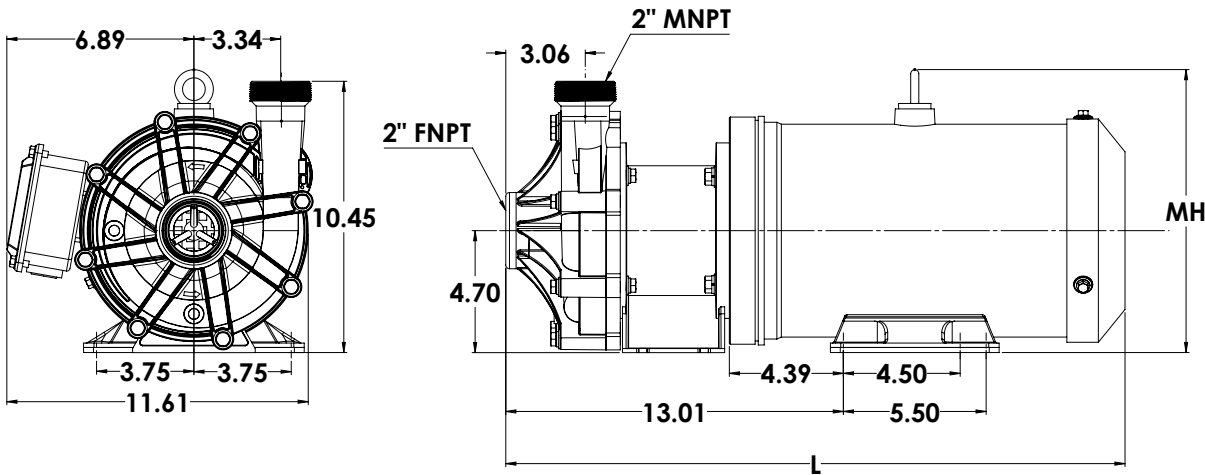

IMP	HP	TYPE	PH	Volt	Hz	AMPS	(DIM) L	(DIM) MH	BASE PART NUMBER
525	5.0	TEFC	3	230/460	60/50	5.5/11.0	23.84	10.7	MC15-525-23D-5T
575	5.0	TEFC	3	230/460	60/50	5.5/11.0	23.84	10.7	MC15-575-23D-5T