


SCOT

MOTORPUMP™ — 3500 RPM
60 HERTZ, 5" FLANGE X 1.25 NPT


125
J56
WVF 125

MOTOR DIMENSIONS
NEMA J56 FRAME 3500 RPM
3 PHASE ODP

HP	FRAME	L	O
2	J56	9.44	6.46
3	J56	10.22	6.46

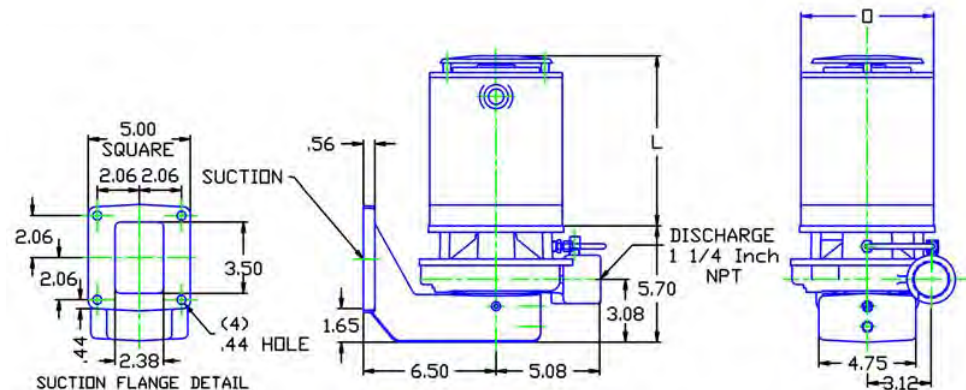

ALL DIMENSIONS IN INCHES

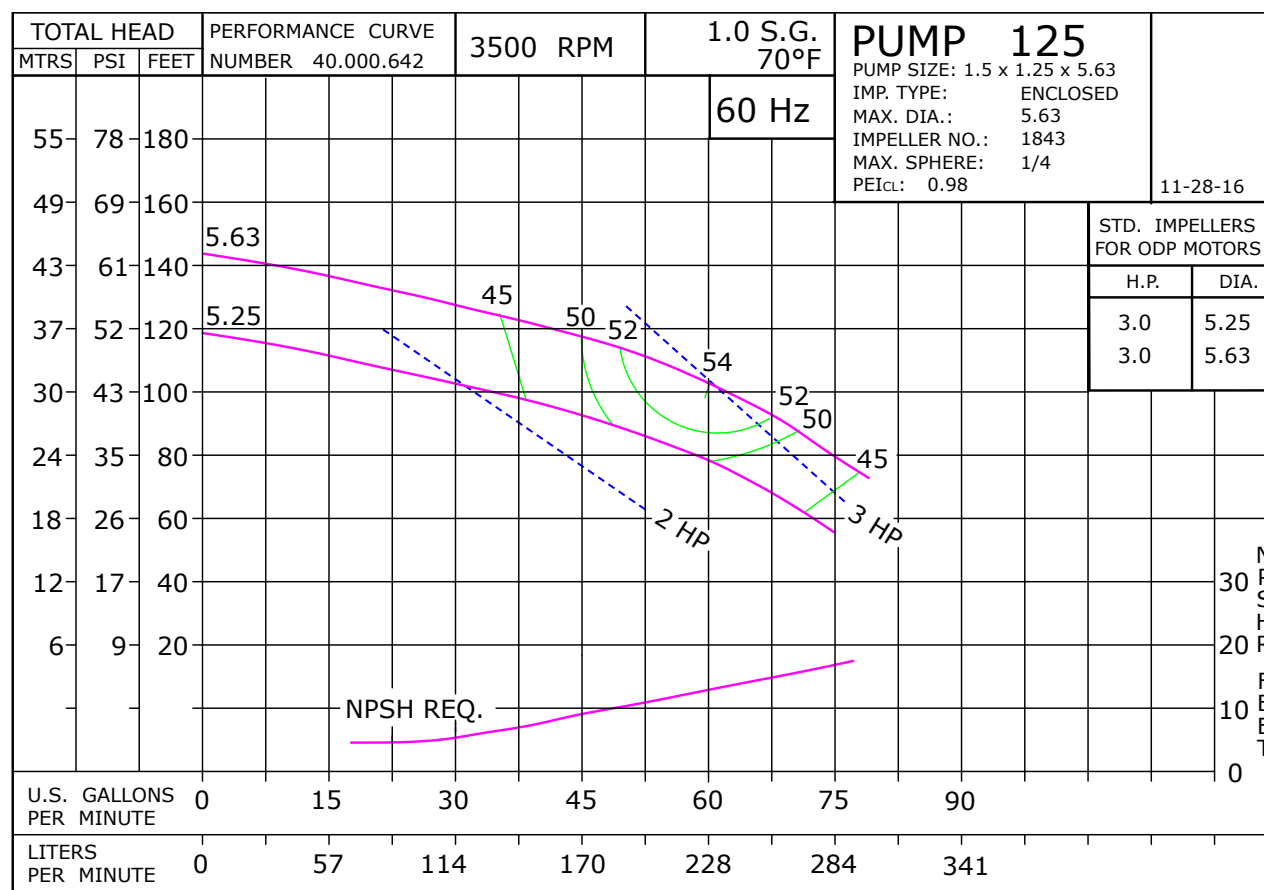


D125J56WVF 1253500
0607WVF

125

J56
WVF 125 125WVFJ56 81.002.100 M19

125WVFJ56

81.002.100 M19

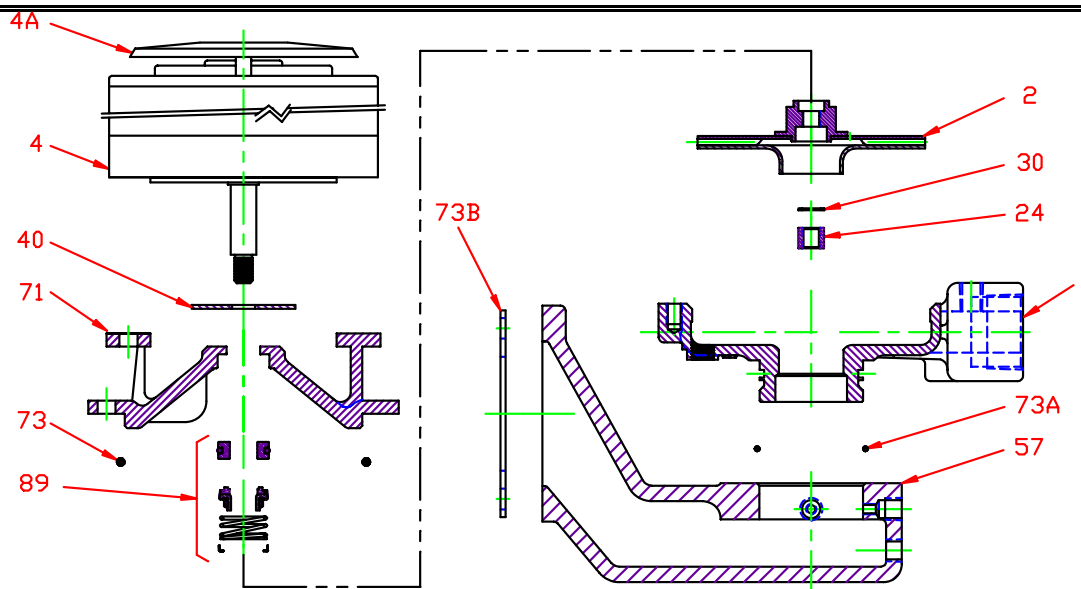WVF 125 • Iron • J56 Frame • 3500 RPM

KEY NO.	PART NAME	WVF 125
1	CASE, IRON, 2.5 TRN x 1.25 NPT Includes Suction Gasket, Key #73A	137.002.410X
2	IMPELLER, STAINLESS STEEL, ENCLOSED, SPECIFY DIAMETER: 5.63 5.25	137.001.912 137.001.912A
4	MOTOR: J56, ROUND BODY J56, 3.5" RIGID BASE	See Chart See Chart
4A	DRIP COVER Varies by motor manufacturer	Contact Factory
24*	NUT, STAINLESS Not Required on 1/3-1-1/2HP 1Phase Motors	105.000.465
30*	D WASHER, STAINLESS Not Required on 1/3-1-1/2HP 1Phase Motors	104.000.168
40*	FLINGER, NEOPRENE	104.000.171
57	FLANGE, IRON, 5" x 5" Includes Flange Gasket Key #73B, Set Screws and Plugs	132.000.206X
71	ADAPTER, IRON	132.000.337X
73*	GASKET, CASE, BUNA	116.000.146
73A	GASKET, CASE SUCTION, BUNA	116.000.148
73B	GASKET, FLANGE	116.000.156
89*	5/8" SEALS: NO RETAINER: (not shown) TYPE 6, BN-CARB/CM	101.000.110
	WITH RETAINER: TYPE 21, VN-CARB/CM	101.000.103
	TYPE 21, VN-CARB/SIL	101.000.120
	TYPE 21, VN-SIL/SIL	101.000.239
	TYPE 21, EPDM-CARB/SIL	101.000.173
	TYPE 21, EPDM-SIL/SIL	101.000.236
--	REPAIR KITS:	1 & 3 PHASE:
	BN-CARB/CM SEAL	118.000.340
	VN-CARB/CM SEAL	118.000.340A
	VN-CARB/SIL SEAL	118.000.340B
	VN-SIL/SIL SEAL	118.000.340J
	EPDM-CARB/SIL SEAL	118.000.340C
	EPDM-SIL/SIL SEAL	118.000.340D

* DENOTES COMPONENTS INCLUDED IN REPAIR KIT.