

Ds4F



Description

The new Verderflex Ds4F, cased drive, peristaltic pump - accurately doses liquids for industries ranging from the aseptic, pharmaceutical environment to the harsh requirements of water treatment and mining.

Your benefits

- Advanced touch screen controls
- Intuitive, easy to follow menus
- Quick change tube elements
- Maximum flow rate 63.4 GPH
- Full colour 4.3" TFT touchscreen

Technical data

Supply voltage	100-240V 50/60Hz AC
Flow range (GPH)	0.08 - 63.4
Speed range (rpm)	1 - 220
Max. discharge pressure (PSI)	58
Power consumption (W)	252
Ambient operating temperature (°F)	39 - 113
Max. temperature of pumped medium (°F)	185
Noise level	<70db(A) @ 1m
IP rating	IP66 NEMA Type 4X
Humidity	10-100% RH (condensing)
Weight (lb)	18.9

Materials

Part	Description
Pump housing	20% GF PPE/PS (Polyphenyl Ether + Polystyrene), Stanyl®
Drive shaft	PA6 (nylon)
Pump head door	Polycarbonate
Pump head enclosure	BMC
Screen guard	Polycarbonate

Ds4F






Features

- Numerical flow display
- Numerical speed display
- Fluid level monitor
- Max (prime)
- Auto restart (after power restored)
- Fluid recovery
- Leak detection
- 4.3" colour touchscreen
- Fault reporting
- Forward + reverse
- Door open sensor

Control methods

- Manual control capability
- Input / Output options
- 4-20mA input
- 4-20mA input, two point calibration
- 4-20mA output
- Contact input (pulse/batch)
- Run stop input
- Alarm output
- Keypad lock
- PIN lock to protect set up

Dimensions

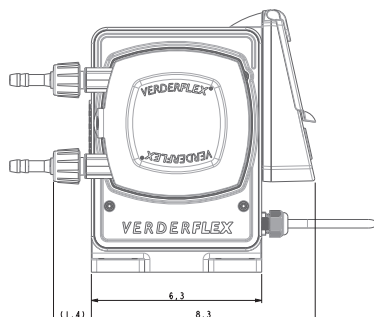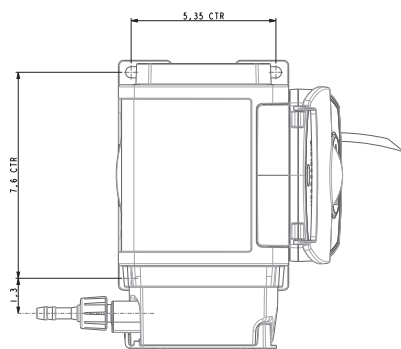

All dimensions are in inches.
All dimensions and weights are for guidance only.

Ds4F



Performance data

Tube material	Tube dims. mm (ID x WT)	Part No.	GPH		Max. pressure PSI	RPM		Shore A (nominal)	Element connector / gasket material	Rotor type
			Min.	Max.		Min.	Max.			
Verderprene (FDA)	4.8 x 2.4	155.9.0022	0.08	17.4	29	1	220	65	PP/EPDM	2.4
	9.6 x 2.4	155.9.0023	0.3	63.4	29	1	220	65	PP/EPDM	
VerderPU	4.8 x 2.4	155.9.0026	0.08	17.4	29	1	220	65	PVDF/PTFE	2.4
	8.0 x 2.4	155.9.0027	0.19	38	29	1	220	65	PVDF/PTFE	
VerderChem	8.0 x 2.4	155.9.0025	0.19	38	29	1	220	65	PVDF/PTFE	2.4
Verderprene	4.8 x 3.2	155.9.0028	0.08	15.4	58	1	180	80	PVDF/PTFE	3.2
	8.0 x 3.2	155.9.0029	0.19	38	58	1	180	80	PVDF/PTFE	
Verderprene (NSF61)	4.8 x 3.2	155.9.0020	0.08	15.4	58	1	180	80	PP/EPDM	3.2
	8.0 x 3.2	155.9.0021	0.19	38.0	58	1	180	80	PP/EPDM	

Product part numbers

Part No.	Description
155.5.1001	Ds4F (UK plug), 2.4WT rotor type
155.5.1002	Ds4F (EU plug), 2.4WT rotor type
155.5.1003	Ds4F (US plug), 2.4WT rotor type
155.5.1004	Ds4F (UK plug), 3.2WT rotor type
155.5.1005	Ds4F (EU plug), 3.2WT rotor type
155.5.1006	Ds4F (US plug), 3.2WT rotor type

Trademarks

VERDERFLEX® is a registered trademark of Verder Liquids B.V. No permission is granted to use any Verder trademarks or trade names included in this document without the prior written agreement of Verder Liquids B.V. Tri-clamp® is a registered trademark of Alfa Laval Corporate AB. Hypalon® is a registered trademark of RSCC Wire & Cable LLC.

Find your local supplier at www.verderliquids.com

For construction, installation and floor mounting drawings please contact your local authorised VERDERFLEX distributor.

A **VERDER** BRAND