





A WILO COMPANY

MOTORPUMP™ — 1750 RPM

Iron, 60 Hz, 5 X 4 X 6.9 ANSI FLG

58 JM**MOTOR DIMENSIONS****NEMA JM FRAME 3 PHASE 1750 RPM**

HP	Type	Frame	D	E	F	O	AB	BG	L	MH
5	ODP	JM184	4.50	3.75	2.75	8.56	6.70	6.25	7.33	0.41
5	TEFC	JM184	4.50	3.75	2.75	8.85	7.57	5.51	7.64	0.41

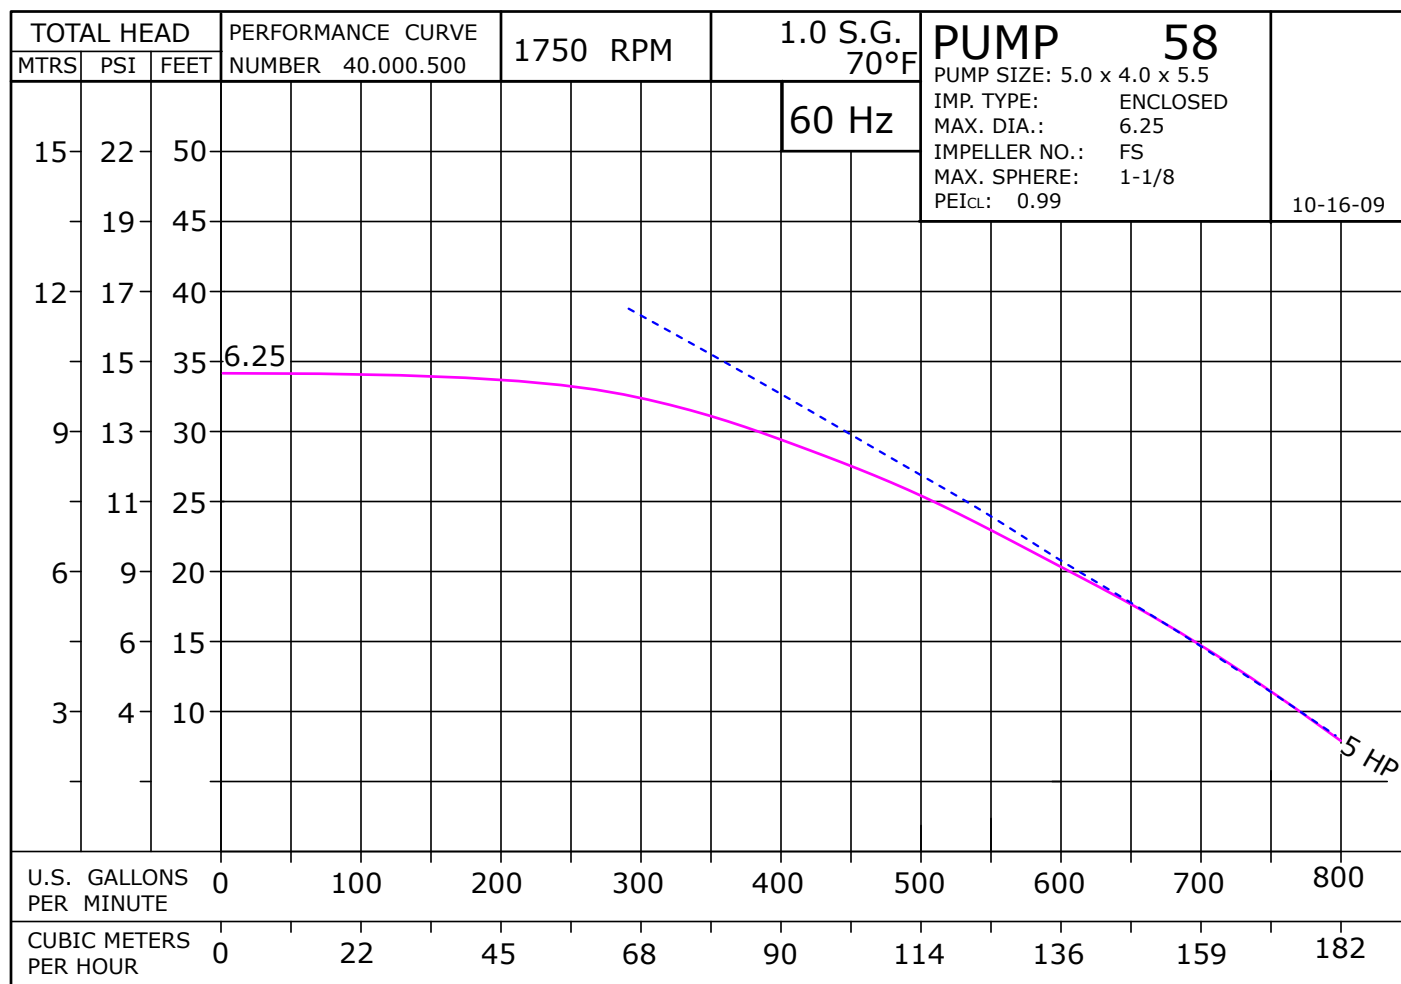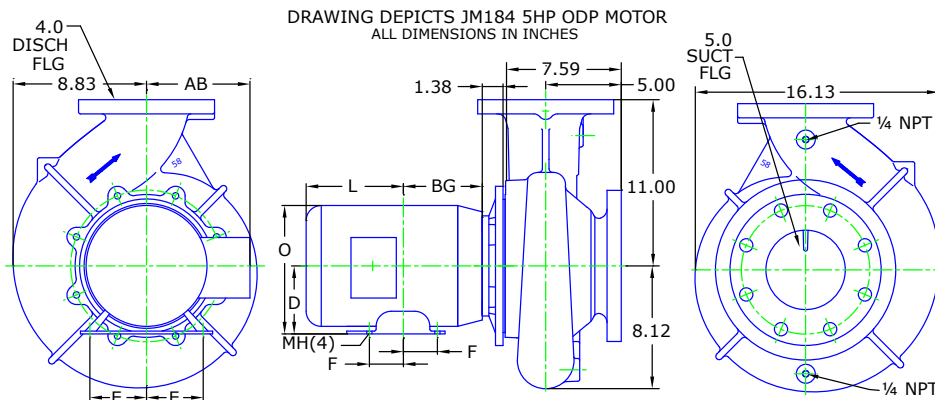




MOTORPUMP™ — 1750 RPM

Iron, 60 Hz, 5 X 4 X 6.9 ANSI FLG

58 JM

Parts

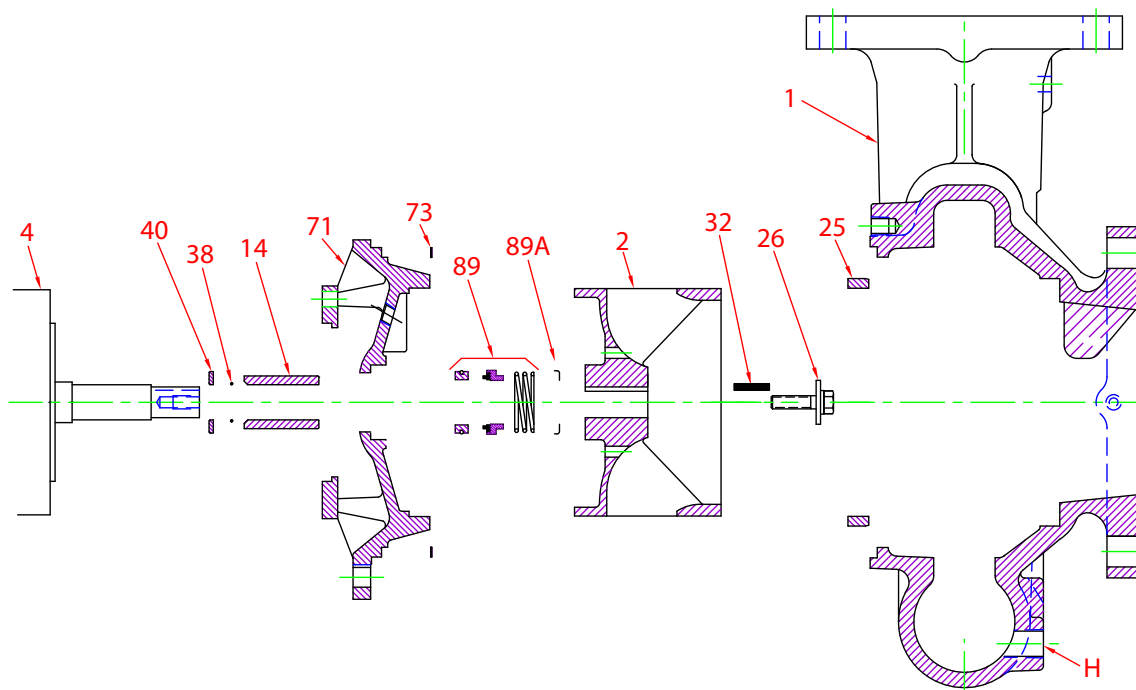

Key	Part Name	Part Number
1+	Case 58, Iron 5.00 X 4.00 FLG Bronze Wear Ring and plugs	137.000.507X
2	Impeller 58, Iron, 6.25 Dia., 7/8" Key	137.002.379
4	Motor chart, JM140/180	See Chart
14*	Shaft sleeve, Bronze	110.000.215
	Shaft Sleeve, Stainless	110.000.373
25	Wear ring, Bronze	103.000.204
26*	Impeller retaining assembly, Stainless	118.000.163A
32*	Key, Stainless	102.000.256
38*	O-ring, Shaft, Buna	116.000.117
	O-ring, Shaft, Viton	116.000.105
40*	Flinger, Stainless	104.000.256
71	Adapter, Iron, JM140 1-1/2" Seal, Brass plug	132.000.308X
73*	Gasket, Case, Fiber	116.000.261
89*	Seal, 1-1/2", Type 21, BN-CARB/CM	101.000.168
	Seal, 1-1/2", Type 21, EPDM-CARB/SIL	101.000.175B
	Seal, 1-1/2", Type 21, EPDM-SIL/SIL	101.000.204A
	Seal, 1-1/2", Type 21, VN-CARB/CM	101.000.191
	Seal, 1-1/2", Type 21, VN-CARB/SIL	101.000.175
	Seal, 1-1/2", Type 21, VN-SIL/SIL	101.000.204
89A*	Seal spring retainer, Stainless	104.000.174
KIT	Repair Kit, 1-1/2" BN-CARB/CM Seal, Brz sleeve, BN O-ring	118.000.466
	Repair Kit, 1-1/2" EPDM-CARB/SIL Seal, Brz sleeve, BN O-ring	118.000.466D
	Repair Kit, 1-1/2" EPDM-SIL/SIL Seal, Brz sleeve, BN O-ring	118.000.466E
	Repair Kit, 1-1/2" VN-CARB/CM Seal, Stn sleeve, VN O-ring	118.000.466A
	Repair Kit, 1-1/2" VN-CARB/SIL Seal, Brz sleeve, BN O-ring	118.000.466B
	Repair Kit, 1-1/2" VN-SIL/SIL Seal, Stn sleeve, VN O-ring	118.000.466C

* Denotes components included in repair kit.


+ Includes bronze wear ring. For steel, replace suffix "X" with "X1".



MOTORPUMP™ — 1750 RPM
Iron, 60 Hz, 5 X 4 X 6.9 ANSI FLG

58 JM

Motor Charts

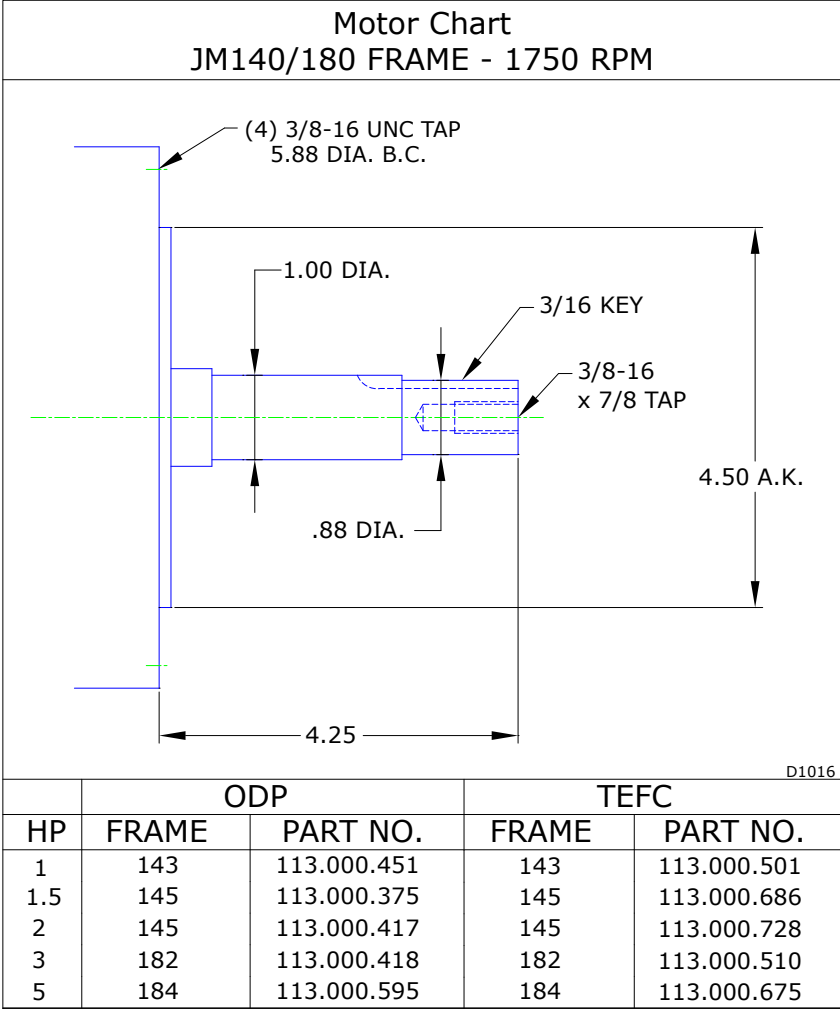




MOTORPUMP™ — 1750 RPM

Iron, 60 Hz, 5 X 4 X 6.9 ANSI FLG

58 JM

Construction Options

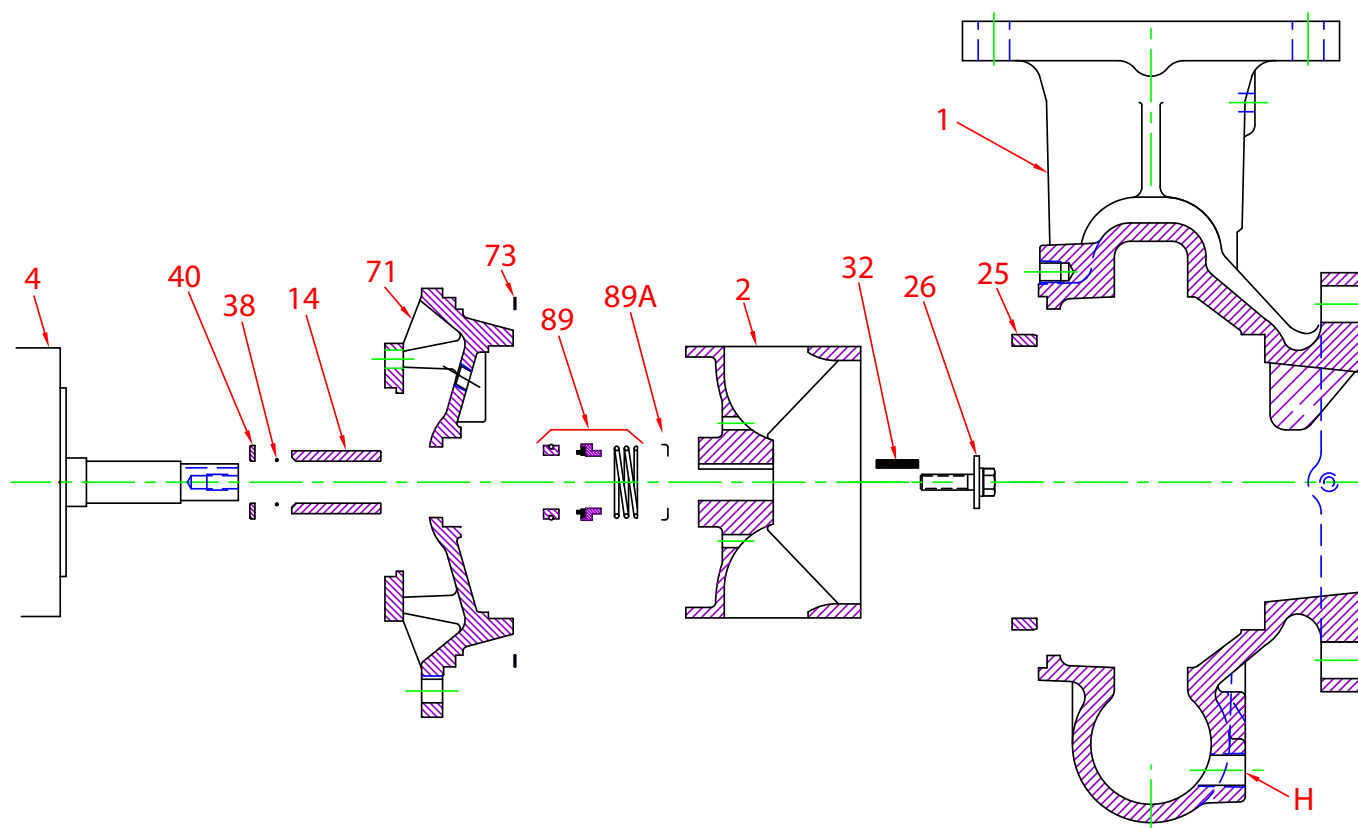

Construction Options			
Key	Part Name	Standard Fitted	All Iron
1	Case	Iron	Iron
2	Impeller	Iron	Iron
14	Shaft Sleeve	Bronze	Stainless
25	Wear Ring	Bronze	Steel
26	Impeller Retaining Assembly	Stainless	Stainless
32	Key	Stainless	Stainless
38	O-Ring, Shaft	Buna	Buna
40	Flinger	Stainless	Stainless
71	Adapter	Iron	Iron
73	Gasket, Case	Fiber	Fiber
89	Mechanical Seal, Type 21 BN-CM	Standard	Standard
89A	Seal Retainer	Stainless	Stainless
H	Plug, Drain	Brass	Plated Steel